



AQMS-500


Sulfur Dioxide Analyzer

FPI AQMS-500 sulfur dioxide (SO₂) analyzer applies UV fluorescence technology with photomultiplier tube (PMT) to measure SO₂.



Features

- Compliance with US EPA reference method;
- Various outputs include ethernet and RS232;
- User friendly interface with large screen;
- Continuous system diagnosis with alarm;
- Multi-tasking software allows viewing test variables while operating;
- Temperature and pressure compensation;
- Internal data logging with 1 min to 365 day multiple averages;
- Critical orifices provide flow stability;

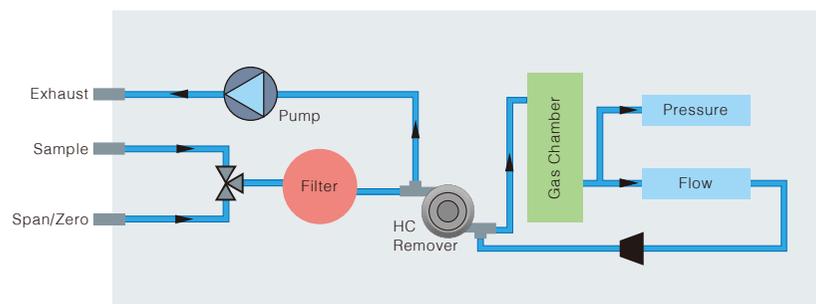

Principle

AQMS-500 measures the intensity of the characteristic fluorescence released by SO₂ in an ambient air sample contained in the gas chamber when the air sample is irradiated by ultraviolet light passed through the chamber.

PMT System

The characteristic fluorescence of SO₂ is received by the photomultiplier tube and converted into an electrical signal. The number of electrons is increased by the photomultiplier system and the current or voltage is collected by the anode.

Data storage and analysis

Stored data are easily retrievable through the serial or ethernet port via PC client software, allowing operators to perform predictive diagnostics and enhanced data analysis by tracking parameter trends.

UV Source

The pulsing of the UV source lamp serves to increase the optical intensity whereby a greater UV energy throughput and lower detectable concentration are realized.

Removal of interferences

The permeation scrubber acting as hydrocarbon kicker removes aromatic hydrocarbon such as xylene and naphthalene which causes interference.

Optical filtering are employed to improve the rejection of interference from high nitrogen oxides.

Technical Data

Standard Range	USEPA Specification: 0-500 ppb
Zero Noise	≤0.25ppb (RMS)
Span Noise	<0.5% (≥50ppb)
Lower Detectable Limit	0.5ppb
Zero Drift	<2ppb/24h
Span Drift	2%F.S./24h
Linearity	<1%F.S.
Precision	<1%
Response Time	T90<120s
Sample Flow Rate	(650±65)sccm
Data Transmission	2 channel analog (4~20) mA; 2 analog (0~5) V; 2 channel analog (4~20) mA; 1 2 digital output; 1 2 digital output; 4-way relay output;
Communication	RS232/RS485/Ethernet
Operating Temperature	USEPA Specification: 20-30°C
Operating Humidity	0~95%RH (No condensation)
Power Requirement	(220±22)VAC , (50±1)HZ
Dimensions and Weight	178(H) x 432(W) x 604(D)mm , 22kg